
PAPA PASTA CONCEPT STORE — CENTRAL KITCHEN LAYOUT — FINAL (REV C)

2nd floor, Bedfordview · base: Ventura VEN41-SK2 (Sept 2026) · store: Papa Pasta 2D plan + ACDC/Ryan lighting plan · Rev C 2026-11-12 · FOR BUILDER PRICING — verify all dimensions on site, not for construction

Store fixed at 5.00 × 8.00 m clear, shopfront to the south corridor. Every Ventura item is kept. Layout tuned for one-way workflow, one wet-services wall and one extract zone.

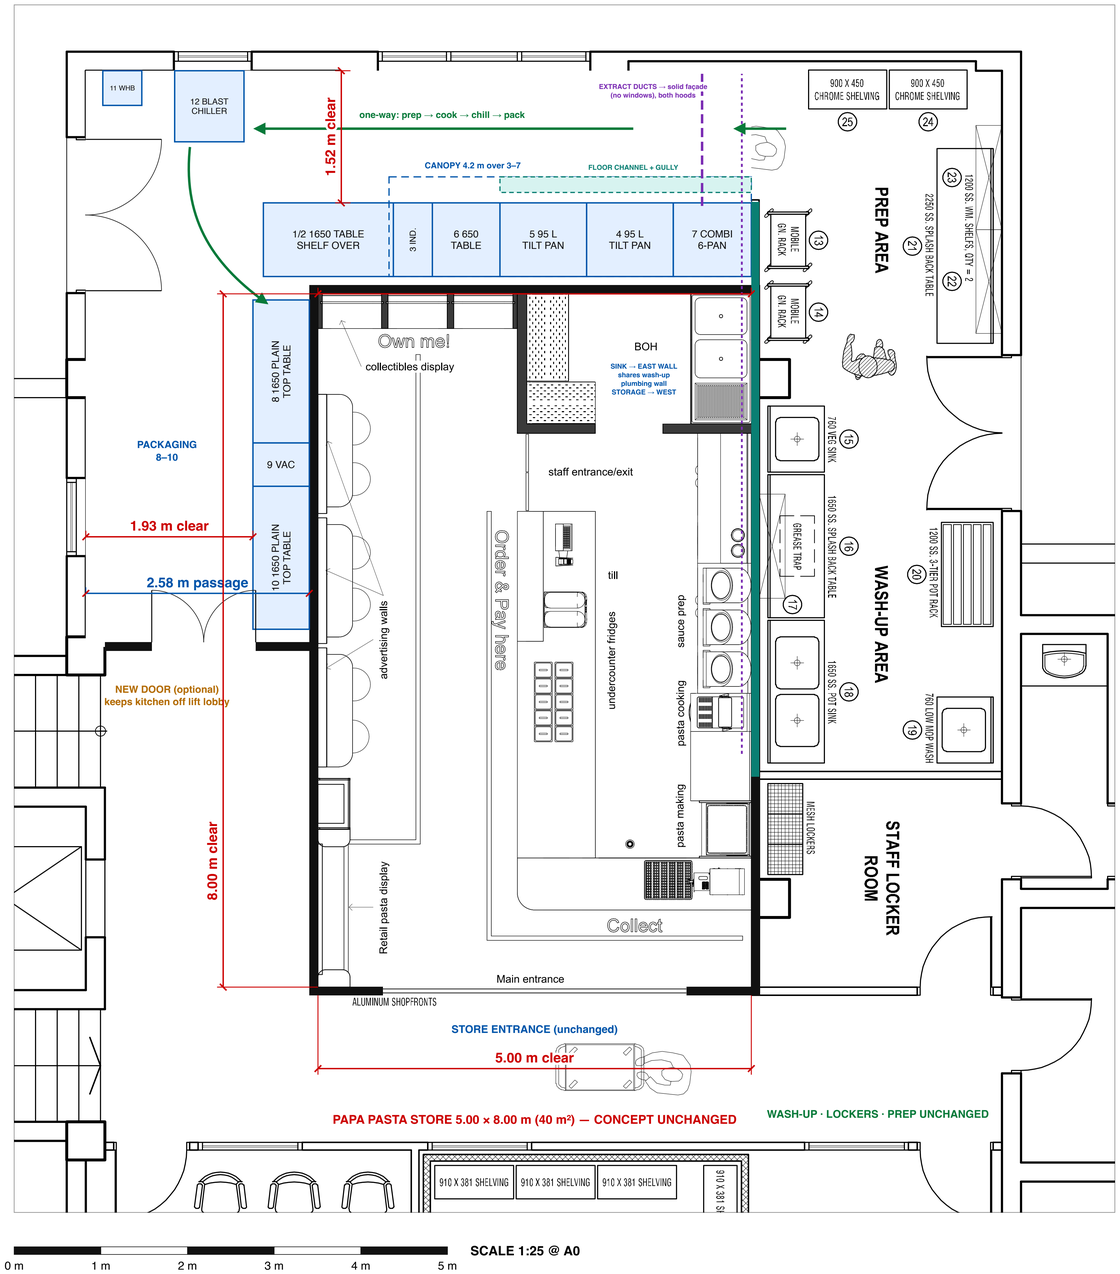

LAYOUT (what changes from Ventura VEN41-SK2)

1 Store at full 5.00 × 8.00 m (40 m²), shopfront to the south corridor. Concept unchanged.
Its east wall is the existing wash-up partition, so no dead strip is left beside it.
2 Cooking line on the store north wall, one run. Wet/hot units (tilt pans 4, 5 and combi 7)
at the EAST end; 1/2 table, induction 3 and table 6 at the west end.
3 Canopy 4.2 m over items 3–7 only (table 1/2 outside, as Ventura drew it). Was 5.6 m.
4 Blast chiller 12 at the hall west end; hand basin 11 at the NW corner by the west door.
5 Packaging 8–10 in the passage (now 2.58 m wide). GN racks 13/14 stay in prep as Ventura drew.
6 Store BOH mirrored: double sink on the east (wash-up) wall, storage/fridges to the west.
7 Prep, wash-up, lockers, coldroom, freezer, dry store, training room: unchanged.
8 Optional door between passage and lift lobby keeps the public out of the kitchen.

WORKFLOW — one direction, no backtracking

Prep (east) → through the hall/prep opening → tilt pans and combi (east end of line)
→ along the 1.52 m aisle → blast chiller (west) → packaging line (passage) → dispatch via
the west door / lift lobby. Dirty returns go east to wash-up; clean and dirty do not cross.

SERVICES STRATEGY — plumbing and extraction

WET SPINE (teal): one services run on the east partition. Combi, both tilt pans, the store
sink and the wash-up sinks/grease trap all sit on it, so drains and water stay short.
FLOOR CHANNEL + gully in front of tilt pans and combi, into the same spine and grease trap.
Chiller 12 + hand basin 11 share one small waste at the west end (chiller condensate).
EXTRACT (purple): canopy collar at the east end, ~2.5 m duct north to the solid façade
section (no windows). The store hood duct runs north in the ceiling along the same
partition to the same façade zone: one penetration zone, one make-up-air design.
GAS: tilt pans and combi are gas; both now at the east end of the line.

CLEARANCES (corrected, measured off the drawings)

Hall walkway in front of the cooking line ..... 1.52 m
Passage clear in front of packaging line ..... 1.93 m
Hall → passage opening at the west end of the line ..... 2.05 m
Nothing on the north wall faces the line, so 1.52 m holds along the full run.
1:50 scale checked on Ventura's 1800 fridge = 1.82 m.

EQUIPMENT SCHEDULE (Ventura item numbers)

1/2	1650 SB table, 1200 shelf over	Line, west end (outside canopy)
3	Induction	Line, under canopy
6	650 SB table	Line, landing for pans
4, 5	95 L gas tilting pans × 2	Line, east end, on channel
7	6-pan GN 1/1 gas combi	Line, east end, on wet spine
8, 10	1650 plain-top tables × 2	Passage, store west wall
9	VPS0400 vacuum packer	Between 8 and 10
11	SS hand basin	Hall NW corner, west door
12	16-tray blast chiller	Hall, west end
13, 14	Mobile GN racks	Prep area (unchanged)
15–25	Wash-up and prep	Unchanged

TO CONFIRM ON SITE BEFORE ORDERING

1 Drain stack positions and slab: route for the wet spine and floor channel to the stack.
2 Façade: duct penetration in the solid section; landlord/body-corporate approval.
3 Gas supply route to the east end of the line; extract and make-up air sizing.
4 Store north wall backs onto the hot line: fire-rated, insulated partition.
5 Fire escape via the west door and passage; ceiling height for Ryan's lighting.
6 Blast chiller stands in front of the 0.9 m west window: confirm, or blank off that pane.
7 Every dimension is scaled from drawings: site-measure before anything is ordered.

Moved from Ventura position
Wet-services spine / floor channel
New (optional) door
Extract duct route
New 100 mm partition